


SEM6-K Erowa

TFT-monitor 6,5"

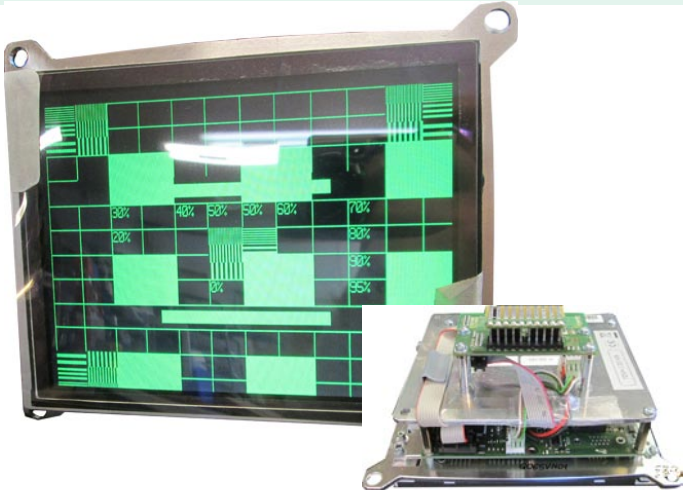

Overview:

- 6,5" TFT / LCD monitor for Elasta VI S4 VISULESTA 4
- replacement for 7" CRT
- interface and timing compatible
- Settings via on-screen-menu
- longterm availability

Description:

Monitors SEM6-K are used as replacement for 7" CRT-monitors in controls ELASTA VI S4 and VISULESTA 4. The default timing is compatible to the control, this means after connecting the monitor the visualisation works correctly. Further adjustments can be made via on-screen-menu. The connector and interface for the graphic-signal are compatible to the control, so the replacement is easy. The monitors are mounting via mounting brackets into the existing frontpanel.

Technical Data:

Overview:

Industrial TFT monitor 6,5" for mounting in controlpanel

control:

ELASTA VI S4 and VISULESTA 4

Interfaces:

Edgeconnector

Synchronisation / Timings:

compatible to control

Resolution:

max. 640x480

Visible picture:

130,5 x 97,9mm

Adjustments:

via on-screen-menu

Brightness / Contrast:

min. 400 cd/qm, 500:1

Power supply:

12VDC

MTBF:

Backlights min. 50000h

Mechanical dimensions:

mounting compatibel to original monitor

Material:

panel: Aluminium

environmental conditions:

operating temperature 0-50°C

storage temperatur 0-65°C

humidity: 10 - 80 % rel. humidity, not condensing

Norms:

EMV: EN55022 EN55024; EN61010-1

part number:

10030866 SEM6-K Elasta Erowa