


SEM15-F BC125

TFT-Replacement 15" Millplus

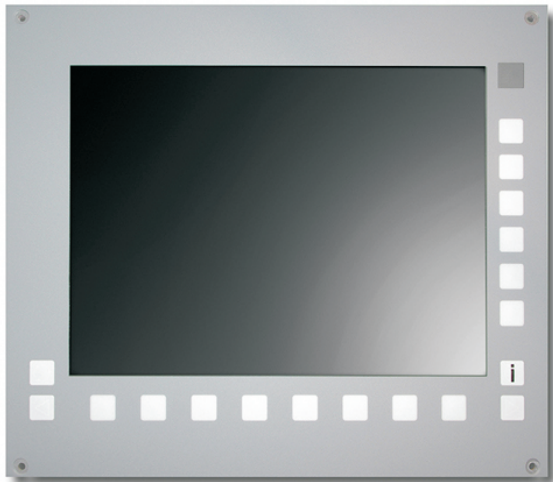

Übersicht

- 15 " TFT/ LCD Monitor frontpanel
- Replacement for 15"CRT BC125 TFT BC125F
- connector and signal timing compatible to the control
- settings via on-screen-menu
- long-term availability
- frontpanel with ingegrated membrane keyboard

Description

The monitors SEM12-F are used as Replacement for CRT-monitors BC125 and TFT monitors BC125F with control Millplus IT from Grundig/ Heidenhain.

The default timing is compatible to the control, this means after connecting the monitor the visualisation works correctly. Further adjustments can be made via on-screen-menu. Fast and simple replacement through mounting holes in the section without any mechanical changes and without any specialized knowledge.

Technical Data

Overview:

Industrial TFT-monitor 15 with frontpanel and keyboard

Control:

Grundig/ Millplus

Original monitor:

BC125/ BC125F

Interfaces:

HD-SUB15, D-SUB9 (Keyboard)

Synchronisation / Timings:

compatible

Resolution:

max. 1024x768

Visible picture:

304x228mm

Adjustments:

via on-screen-menu

Brightness / Contrast:

min. 300 cd/qm, 500:1

Power supply:

115/230VAC

MTBF:

Backlights min. 40000h

Mechanical dimensions:

Frontpanel: 400 x 350 mm

mounting holes: 376 x 332 mm

Material:

Frontpanel: aluminium with membrane keys

Environmental conditions:

Operating temperature 0-50°C

Storage temperature 0-65°C

Humidity: 10 - 80 % rel. humidity, not condensing

Protection class:

Front IP 65

Norms:

En55022 EN55024 EN61010-1

Part Number:

10030886 SEM15-F-Millplus-BC125