


TFT-replacement 9"

Sharp LJ640U32

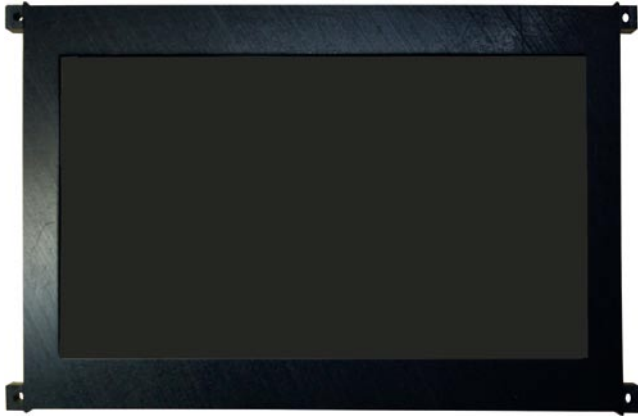

Overview:

- 9" TFT replacement Display
- replacement for Sharp LJ640U32
- connector and signal timing compatible to the control
- adjustments via On-Screen-Menue
- long-term availability
- front adapter black with holes

Description:

9" Displays are used as replacement for 9" Sharp LJ640U32 in various machines and controls.

The default timing is compatible to the control, this means after connecting the display the visualisation works correctly. Further adjustments can be made via on-screen-menu. The connector and interface for the graphic-signal and power supply are compatible to the control, so the replacement is easy.

Technical Data:

Overview:

9" TFT replacment für 9" Sharp

Control:

e.g. Heidenhain, Siemens, Index

Original monitor:

9" Sharp LJ640U32

Interface:

16pin post plug for ribbon cable

Synchronisation/ Timings:

compatible to control

Resolution:

max. 800x480

Adjustments:

On-Screen-Menu

Brightness/ Contrast:

min. 400cd/qm; 500:1

Power supply:

12 VDC

MTBF:

Backlights min. 5000h

Mechanical dimensions:

depth: 45mm

front adapter: compatible

Material:

front adapter: plastic black

Environmental conditons:

operating temperature 0-50°C

storage temperature 0-65°C

humidity: 10 - 80 % rel. humidity,

not condensing

Norms:

EMV: EN55022 EN55024

EN61010-1

Part Number:

10030522

9" EL Display Sharp
LJ640U32